

## 4 \*2.5GBase-X SFP + 8 \*10/100/1000Base-T PoE Ports

### Managed Industrial PoE Switch

#### LT-IS6212XGP-4GQ8GT

#### Overview:

SmartByte's LT-IS6212XGP-4GQ8GT is a 4\*2.5GBase-X SFP ports + 8\*10/100/1000Base-T RJ45 PoE ports managed industrial PoE switch. It complies with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port, which is ideal choice for surveillance, wireless and VoIP networks. Through the fan-less cooling design, wide range working environment temperature  $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$ , high protection level and industry quality, it is one of the most reliable choice for easy managed Fiber Ethernet application under harsh environment. Meanwhile, it supports the public Ethernet multi ring protection technology (ERPS), which can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. It can meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.

#### Picture



## Features:

- 4\*2.5GBase-X SFP ports uplink, 8\*10/100/1000Base-T RJ45 PoE ports downlink
- DC48~58V wide input, redundant power with polarity reverse protect function
- Complies with IEEE802.3af and IEEE802.3at PoE standard protocol, Max consumption per port can reach 30W (PoE+)
- IP40 industrial case protection level and fan-less design
- Industrial Marvell chipset to make sure the high performance and quality
- Layer 2 features: Support flow control, 10K bytes Jumbo frame, VLAN; ERPS, STP/RSTP/MSTP; Link aggregation, IGMP snooping, port mirroring, storm control, QinQ, 802.1X, port isolation, RMON, NTP client, DHCP snooping/client, Ping/Tracert test, Dying gasp , ACL, QoS , PoE management and SFP DDM function
- Management and maintenance: IPv4 and IPv6 dual stack management; Support Web, SNMP, CLI, Telnet/SSH management method; Support user management, system log, configuration upload/download through web interface, firmware upgrade via HTTP/TFTP
- Support watchdog function, which can make the equipment work again if it is frozen
- Support ring, star, bus, tree and hybrid network topology
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV protection
- Support Din-rail installation
- Operation temperature: -40°C~+75°C
- 5 years warranty


## Technical Specification

<b>Ports Interface</b>	
Fixed port	4*2.5G Base-X SFP slots + 8*10/100/1000 Base-T RJ45 ports
Management Port	Support console
Power interface	Phoenix terminal, dual power input
LED indicators	PWR, Link/ACT LED
<b>Cable Type &amp; Transmission Distance</b>	
Twisted-pair	0-100m (CAT5e,CAT6)
SFP slots	Depending on the SFP module
<b>Network Topology</b>	
Ring topology	√
Star topology	√
Bus topology	√
Tree Topology	√
Hybrid topology	√
<b>Electrical Specifications</b>	
Input voltage	DC48~58V(PoE)
Total Power consumption	< 250W(PoE), depending on the power supply
<b>PoE Support</b>	
PoE port	1-8
PoE Protocol	IEEE802.3af & IEEE802.3at
Pin Assignment	1/2(+) 3/6(-)
PoE Management	√
<b>Layer 2 Switching</b>	
Switching capacity	36G
Packet forwarding rate	26.78Mpps
MAC address table	16K
VLAN	Support 4K
Buffer	12M
Forwarding delay	<10us
MDX/MIDX	√
Flow control	√
Jumbo Frame	Support 10Kbytes
Spanning Tree	Support STP/RSTP/MSTP
Ring Protocol	Support ERPS
Link Aggregation	Support 12 groups
Multicast	Support IGMP Snooping
Port Mirroring	√
Storm Control	√
Interface Counters	√
QINQ	√
802.1X	√

MAC Authentication	√
Port Isolation	√
RMON	√
NTP Client	√
DHCP CLIENT	√
DHCP snooping	√
Ping/tracert test	√
Dying gasp	√
DDM	√
<b>Convergence</b>	
ACL	Support ACL 500 Support IP standard ACL Support MAC expand ACL Support IP expand ACL
QoS	Support QoS re-marking, priority mapping Support SP, WRR queue scheduling Support egress rate-limited, egress rate-limit Support Policy-based QoS
<b>Management</b>	
CLI	√
Console	√
Management IP	Support IPv4/IPv6
Telnet/SSH	√
WEB management	√
SNMP	Support SNMPv1/v2c/v3
User Management	√
System Log	√
Configuration File Download/Upload	√
Upgrade Firmware	√
<b>Environment</b>	
Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+85°C
Relative humidity	5%~95% (non-condensing)
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours
<b>Mechanical Specification</b>	
Dimension	48X104X143mm
Installation method	DIN-rail
Weight	Net weight 0.58KG
<b>Protection &amp; Certification</b>	
Case protection level	IP40
Surge protection of Power	IEC 61000-4-5 Level X (6KV/6KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 4 (4KV/4KV) (10/700us)
RS	IEC 61000-4-3Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)

PFMF	IEC 61000-4-8 Level 4 (30A/m)
DIP	IEC 61000-4-11Level 3 (10V)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m
Certification	CE/FCC/RoHS/CCC
<b>Warranty</b>	5 years

## Appearance diagram

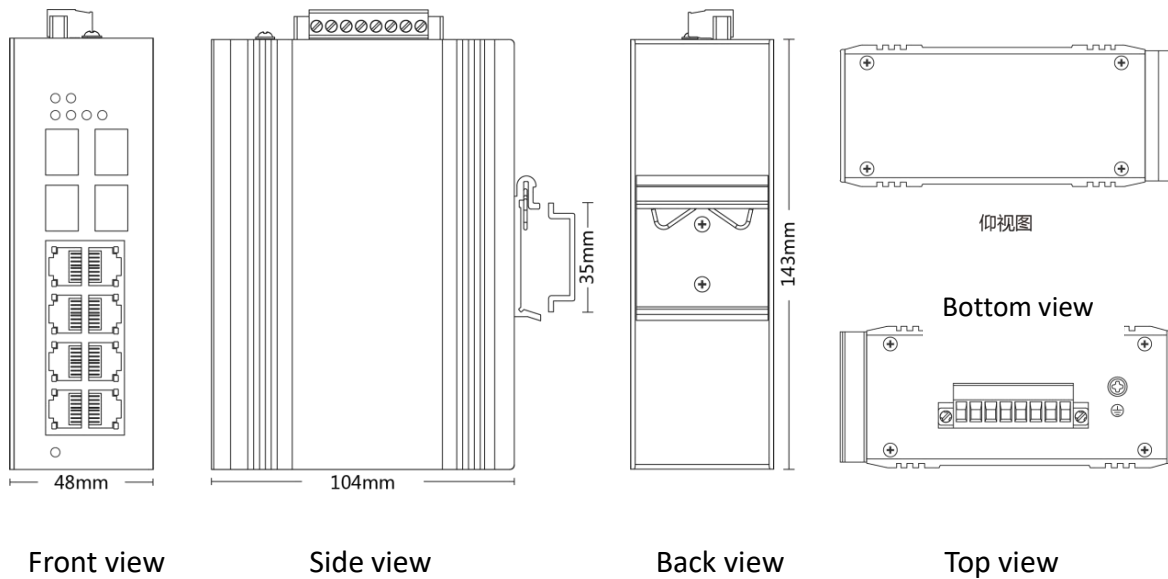

## Order information

Model	Description
LT-IS6212XGP-4GQ8GT	10/100/1000Base-T to 2.5GBase-X managed industrial POE switch, 4*1000M 2.5G slots + 8*10/100/1000M RJ45 PoE ports, complies with IEEE802.3af & IEEE802.3at standard PoE protocol, DC48-58V, Phoenix terminal, redundant dual power supply, Din-rail installation. Transmission distance depending on the SFP module; Operation temperature: -40℃~+75℃

# **SmartByte**

*The Real Source Factory of Ethernet Switches*

Website: [www.smartbyte-switch.com](http://www.smartbyte-switch.com); E-mail: [peter@smartbyte.com.cn](mailto:peter@smartbyte.com.cn);

Technical support & online service: whatsapp/skype/wechat/mobile: +8618938064521